

# Disc Prime Direct-Indirect Surface



Model no : DLADPRBSD-40

LED lights are made from light emitting diode technology due to which they provide extreme energy efficiency to the user. When it comes to replace fluorescent lamps, LED linear lights are perfect replacement lighting with reduced costs and better brightness.




Low-power LEDs



5700K



IP40



Excellent thermal  
management

McAdam 3



Direct-Indirect

# Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

## 1 - Optics

Opal Diffuser

## 2 - LED Module

Up-8W

Down-32W

Total Wattage-40W

## 3 - Luminaire head and housing

Aluminum

## 4 - Control Gear

NON-Dimmable/Dali-2 Dimmable


## 5 - Protection Mode

IP40

## 6 - CCT

5700K

Construction

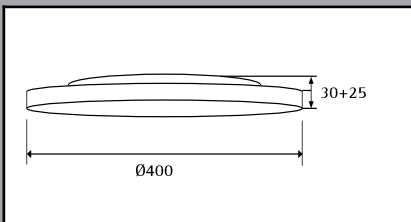

Dimensions

Dia=400mm  
H=30+25mm

Efficacy

110 lm/W

CRI

≥80

Mounting

Surface

Life Span

L70 ≥60000H

THD

<10%

Light Distribution

Direct-Indirect

Dimming

NON-Dimmable/  
Dali-2 Dimmable

Color housing

Powder coated

Led Module

Up-8W  
Down-32W  
Total Wattage-40W

CCT

5700K

Input Voltage

220-240 Vac

Power Factor (PF)

0.95

McAdam

3rd

UGR

<19

