



Sovitron Interior Pvt.Ltd.




|                    |                              |
|--------------------|------------------------------|
| <b>Model Name</b>  | GOTHIC-1105S/DL-OSL-1105SA-3 |
| <b>Description</b> | Flood light                  |

| Technical description | Image |
|-----------------------|-------|
|-----------------------|-------|

|                            |   |
|----------------------------|---|
| <b>Dimension</b>           | Dia=85mm<br>L=128mm<br>H=145mm              |
| <b>Frame</b>               | Aluminium Die-cast                          |
| <b>Color Tempertaure</b>   | 4000K                                       |
| <b>Power</b>               | 3.5 W                                       |
| <b>Total Luminous Flux</b> | 227 lm                                      |
| <b>Efficacy</b>            | 65 lm/W                                     |
| <b>IP rating</b>           | 66  |
| <b>Beam angle</b>          | 5,12.5, 20, 30, 45,<br>60,15X30,10X60Degree |
| <b>Color Rendering</b>     | ≥80   |
| <b>Mounting</b>            | Spike Mounted                               |
| <b>Optics</b>              | Lens & Clear Glass                          |
| <b>Dimming</b>             | NON-Dimmable                                |
| <b>Operating Voltage</b>   | 220-240 VAC                                 |
| <b>Standard Lifetime</b>   | L70 minimum at 50,000<br>burning hours      |



**Dimension diagram**

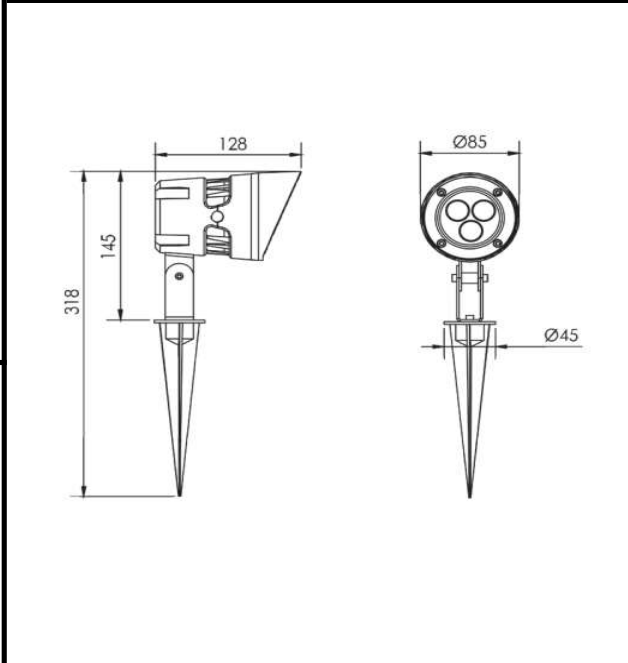

**Remarks:-**