



Sovitron Interior Pvt.Ltd.



|                    |                              |
|--------------------|------------------------------|
| <b>Model Name</b>  | UNITY-2306 / DL-OSL-2306A-24 |
| <b>Description</b> | linear Inground light        |


| Technical description | Image |
|-----------------------|-------|
|-----------------------|-------|

|                            |  |
|----------------------------|--|
| <b>Dimension</b>           | L=1000mm<br>Cutout W=70mm<br>With trim W=80mm<br>H=100mm |
| <b>Frame</b>               | Aluminum   |
| <b>Color Tempertaure</b>   | RGB  |
| <b>Power</b>               | 28W  |
| <b>Total Luminous Flux</b> | 1120 lm  |
| <b>Efficacy</b>            | 65 lm/W  |
| <b>IP rating</b>           | 67   |
| <b>Color Rendering</b>     | ≥80  |
| <b>Mounting</b>            | Buried   |
| <b>Beam angle</b>          | 5, 12.5, 20, 30, 45, 60,<br>15X30, 10X60 Degree          |
| <b>Optics</b>              | Tempered glass   |
| <b>Dimming</b>             | NON-Dimmable   |
| <b>Operating Voltage</b>   | 220-240 VAC  |
| <b>Standard Lifetime</b>   | L70 minimum at 50,000<br>burning hours                   |



**Remarks:-**

**Dimension diagram**

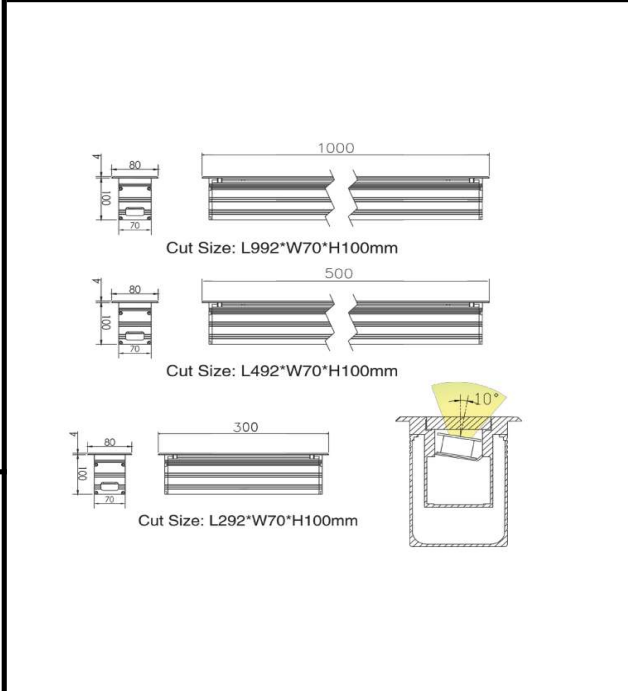

Address: Plot #7 Saroorpur-Nangla Industrial Area,Ballabgharh-Sohna Road,Faridabad-121005  
Email: info@sovitron.com