
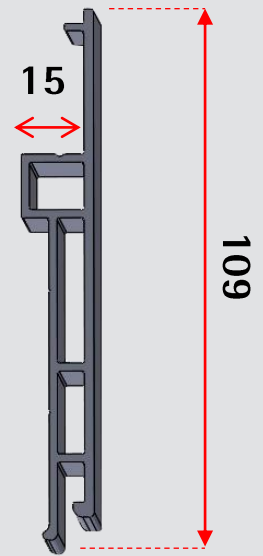



Stretch Fabric Light

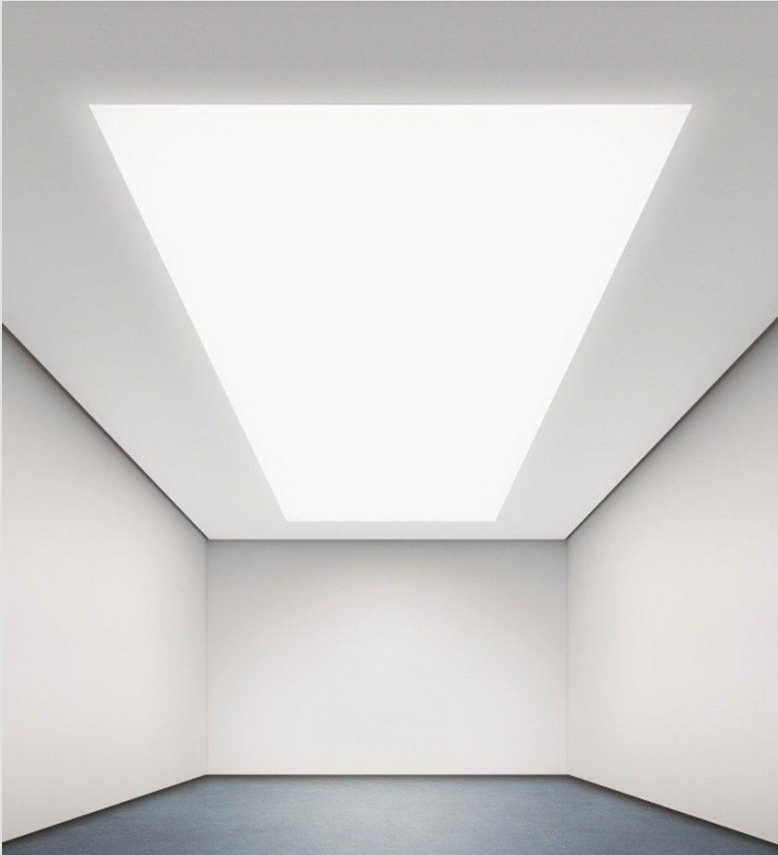

Stretch Fabric Profile

Model no : DLTSTRDRF-15

Stretch Fabric luminous ceiling liberates you from the constraints of conventional ceiling design so you're free to pursue uncluttered minimalistic visions – and transform any interior into one cohesive space with beautiful homogeneous light.



Low -power LEDs



3000K

IP20



Excellent thermal management

Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

1 - Optics

Stretch Fabric

2 - LED Module

15W/Sqft

3 - Luminaire head and housing

Aluminium + Stretch fabric

4 - Control Gear


NON-Dimmable / Dali-2 Dimmable

5 - Protection Mode

IP20

6 - CCT

3000K

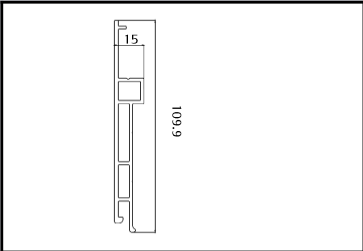Construction		Light Distribution	155°
Dimensions	Profile W=15mm, H=109.9mm Thickness=2mm	Dimming	NON-Dimmable/ Dali-2 Dimmable
Efficacy	100 lm/Sqft	Housing Finish	N.A
CRI	≥80	Led Module	15W/Sqft
Mounting	Recessed	CCT	3000K
Life Span	L70 ≥60000H	Input Voltage	220-240 Vac
UGR	≤19	Power Factor (PF)	0.95
		McAdam	3rd

