



# Stretch Fabric Light

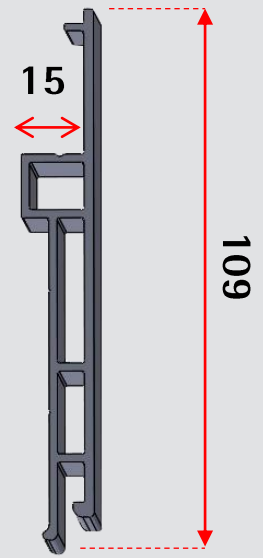

Stretch Fabric Profile

**Model no :** DLTSTRDRF-15

Stretch Fabric luminous ceiling liberates you from the constraints of conventional ceiling design so you're free to pursue uncluttered minimalistic visions – and transform any interior into one cohesive space with beautiful homogeneous light.



Low -power LEDs



4000K

IP20



Excellent thermal  
management

# Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

## 1 - Optics

Stretch Fabric

## 2 - LED Module

15W/Sqft

## 3 - Luminaire head and housing

Aluminium + Stretch fabric

## 4 - Control Gear

NON-Dimmable / Dali-2 Dimmable


## 5 - Protection Mode

IP20

## 6 - CCT

4000K

Construction

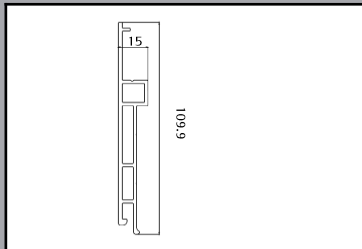

Dimensions

Profile W=15mm,  
H=109.9mm  
Thickness=2mm

Efficacy

100 lm/Sqft

CRI

≥80

Mounting

Recessed

Life Span

L70 ≥60000H

UGR

≤19

Light Distribution

155°

Dimming

NON-Dimmable/  
Dali-2 Dimmable

Housing Finish

N.A

Led Module

15W/Sqft

CCT

4000K

Input Voltage

220-240 Vac

Power Factor (PF)

0.95

McAdam

3rd

